


NIM-Crate Stecker

MODULE CONNECTOR

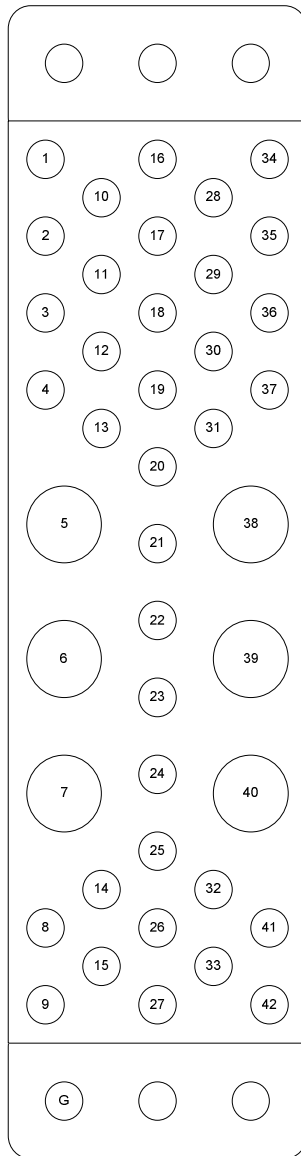

REAR VIEW

PIN	FUNCTION
1	RESERVED
2	RESERVED
3	SPARE
4	RESERVED
5	
6	
7	
8	+200 V D.C.
9	SPARE
*10	+6 V
*11	-6 V
12	RESERVED
13	SPARE
14	SPARE
15	RESERVED
*16	+12 V
*17	-12 V
18	SPARE
19	RESERVED
20	SPARE
21	SPARE
22	RESERVED
23	RESERVED
24	RESERVED
25	RESERVED
26	SPARE
27	SPARE
*28	+24 V
*29	-24 V
30	SPARE
31	SPARE
32	SPARE
33	117 V A.C. (HOT)
*34	POWER RETURN GND
*35	RESET
36	GATE
37	SPARE
38	
39	
40	
*41	117V A.C. (NEUTRAL)
*42	HIGH QUALITY GND
G	GROUND GUIDE PIN

* Must be bussed to all bin connectors GPIB through PG12B.